

### DELO-ML® DB154

Anaerobic- and light curing adhesive, high-strength

#### Base

- Modified urethane acrylate
- one-component, solvent-free
- dual-curing adhesive

#### Use

- fixing: coaxial components, e. g., bearings or sockets
- adhesive leaking from the bonding gap can be cured in seconds with visible light
- therefore, firmness to touch can be reached faster
- DELO curing lamps generating radiation adjusted to the adhesives are available to initiate this reaction
- easy application control due to fluorescent color
- the cured product is normally used in a temperature range of -60 °C to +180 °C; depending on the application, other limits may be more reasonable
- compliant with RoHS directive 2015/863/EU

#### Processing

- the surfaces to be bonded must be dry as well as free of dust, grease and other contaminations
- DELOTHEN cleaners are recommended for the optimal preparation of bonding areas
- thread connections must be tightened well
- the adhesive is good to dispense from original containers or by means of dispensing systems suitable for anaerobic-curing adhesives

#### Curing

- anaerobic, i.e., by exclusion of air and under metal influence at room temperature with small gap
- the curing may be assisted by application of heat, use of activator and/or light, e.g. if the curing speed is too slow or if it comes to larger gaps
- the build-up of strength depends on the components and the geometry joined. The initial strength is achieved after just a few minutes. Significant acceleration is possible by using an activator and/or applying heat
- curing with UV light in a wavelength range of 320 – 450 nm. DELOLUX LED curing lamps are especially suitable as per the chart below. All standard DELOLUX HID discharge lamps are also suitable
- both curing mechanisms can be used in combination or separately

Lamp type	DELOLUX 20 / 50 / 80		
Wavelength [nm]	365	400	460
Suitability	++	++	-

- not suitable + suitable ++ especially suitable

**DELO** Industrial Adhesives  
DELO-Allee 1  
86949 Windach · Germany  
Phone +49 8193 9900-0  
Fax +49 8193 9900-144  
info@DELO.de · www.DELO.de

## **Properties**


- light-curing and anaerobic-curing
- visible adhesive in boundary areas can be cured with visible light
- high strength, difficult to remove

## **Technical data**


<i>Color</i>	yellow fluorescent
preferred clearance [mm]	0,05-0,1
clearance with heat or activator [mm]	up to 0,3-0,4
clearance with light curing [mm]	4
Density [g/cm <sup>3</sup> ] at room temperature (approx. 23 °C)	1.1
<i>Viscosity [mPas]</i> at 23 °C, Brookfield spindle/rpm 4/5	6000
Curing time until initial strength [min] at room temperature (approx. 23 °C), anaerobic on zinc-phosphated screws	approx. 2- 4
Minimal irradiation time [s] DELO Standard 23, UVA intensity: 60 mW/cm <sup>2</sup> , DELOLUXcontrol	6
Off-torque without Mon [Nm]	34
Off-torque with Mon 46 Nm [Nm]	65
Compression shear strength after 1 h [MPa] according to ISO 10123	30
<i>Compression shear strength shaft/hub steel [MPa]</i> according to ISO 10123	35
Compression shear strength glass/glass [MPa] DELO Standard 5 UVA intensity: 55 - 60 mW/cm <sup>2</sup> , DELOLUXcontrol	20
Compression shear strength PA/PA [MPa] DELO Standard 5 UVA intensity: 55 - 60 mW/cm <sup>2</sup> , DELOLUXcontrol	15
Compression shear strength VA/PA [MPa] DELO Standard 5 UVA intensity: 55 - 60 mW/cm <sup>2</sup> , DELOLUXcontrol	11
Compression shear strength VA/PA [MPa] DELO Standard 5 curing: 24h at room temperature with DELO-QUICK 5002	4
compression shear strength VA/PPA [MPa] DELO Standard 5 curing: 24h at room temperature with DELO-QUICK 5002	6

curing progress

compression shear strength shaft-hub joint  
 based on initial value at room temperature  
 measured at room temperature (approx. 23 °C)  
 according to ISO 10123

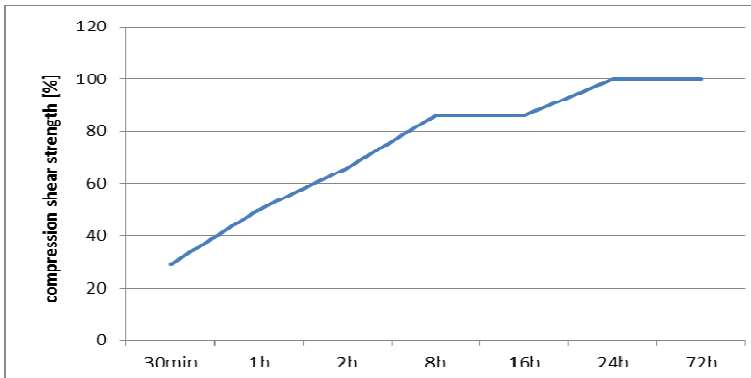

compression shear strength shaft-hub joint with activator DELO-QUICK 5006  
 based on initial value at room temperature  
 measured at room temperature (approx. 23 °C)  
 according to ISO 10123

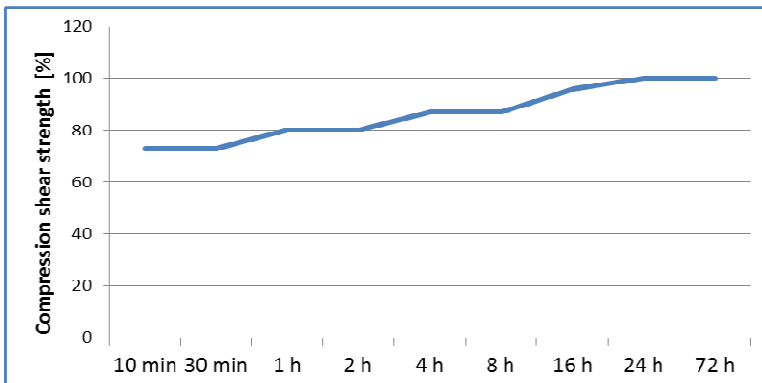

Tensile shear strength Al/Al [MPa] DIN EN 1465, sand- blasted	13
Tensile shear strength St/St [MPa] DIN EN 1465, sand-blasted	16
Tensile strength [MPa] DIN EN ISO 527	70
Elongation at tear [%] DIN EN ISO 527	4
Young's modulus [MPa] DIN EN ISO 527	3000
Shore hardness D DIN EN ISO 868	84
Glass transition temperature [°C] rheometer	110
Shrinkage [%] DELO Standard 13	8.4

# Water absorption [%]

DIN EN ISO 62

0.7


# Storage life

In unopened original container up to 600 ml at room temperature (0-25°C)


6 months

## Performance under temperature influence


compression/shear strength shaft-hub joint after temperature storage based on initial value at room temperature measured at room temperature (approx. 23 °C) according to ISO 10123

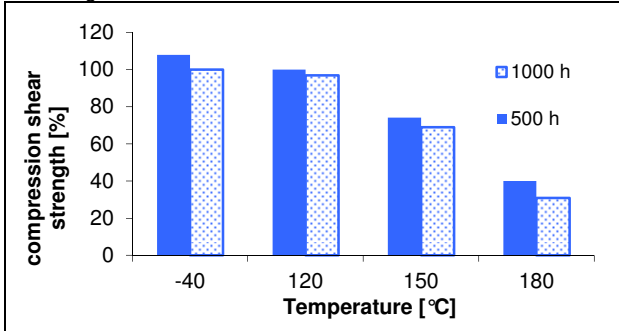


compression/shear strength shaft-hub joint at temperature based on initial value at room temperature measured at determined temperature according to ISO 10123

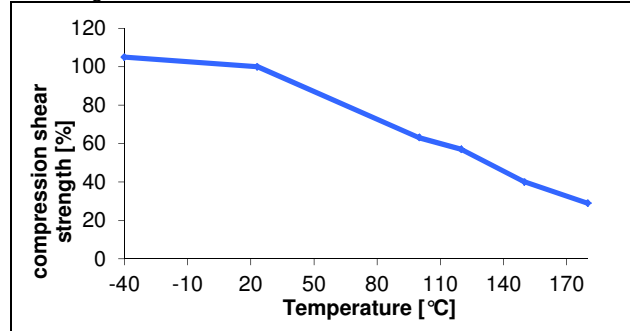


tensile strength after temperature storage based on initial value at room temperature measured at room temperature (approx. 23 °C) according to DIN EN 527, test specimen type 5A, thickness 2 mm

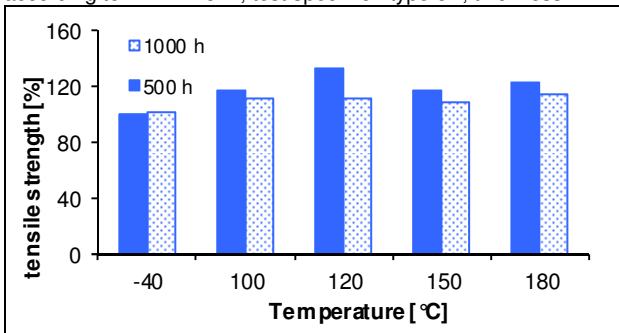

Young's modulus after temperature storage based on initial value at room temperature measured at room temperature (approx. 23 °C) according to DIN EN 527, test specimen type 5A, thickness 2 mm

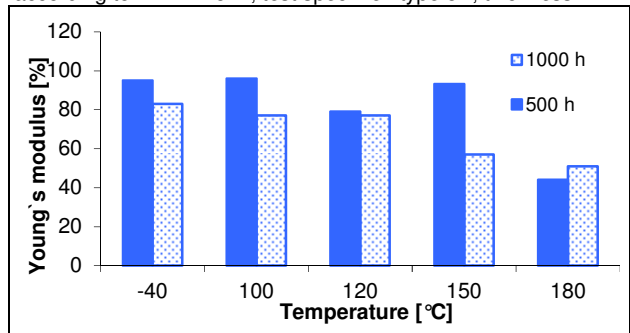

elongation at tear after temperature storage based on initial value at room temperature measured at room temperature (approx. 23 °C) according to DIN EN 527, test specimen type 5A, thickness 2 mm

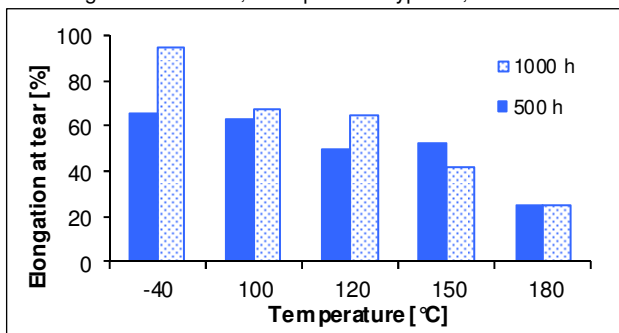

## Performance under chemical influence

compression shear strength after storage for 1,000 h  
based on initial value at room temperature  
measured at room temperature (approx. 23 °C)  
according to ISO 10123

Chemical medium	Compression/shear strength <u>shaft-hub joint</u> [%]
ATF gear oil	111
Diesel fuel	114
engine oil	123
fuel	123

## **Instructions and advice**

### General

The data and information provided are based on tests performed under laboratory conditions. Reliable information about the behavior of the product under practical conditions and its suitability for a specific purpose cannot be concluded from this. It is the customer's responsibility to test the suitability of the product for the intended purpose by considering all specific requirements. Type and physical and chemical properties of the materials to be processed with the product, as well as all actual influences occurring during transport, storage, processing and use, may cause deviations in the behavior of the product compared to its behavior under laboratory conditions. The data and information provided are therefore no guarantee for specific product properties or the suitability of the product for the intended purpose.

Nothing contained herein shall be construed to indicate the non-existence of any relevant patents or to constitute a permission, encouragement or recommendation to practice any development covered by any patents, without permission of the owner of this patent.

All products provided by DELO are subject to DELOs' General Terms of Business. Verbal side agreements are not permitted. This document is subject to change.

### Instructions for use

The instructions for use of DELO-ML are available on: [www.DELO.de](http://www.DELO.de). We will be pleased to send them to you on demand.

### Occupational health and safety

see material safety data sheet

### Specification

The properties in *italics* are part of the specification. Ranges with clear limits are defined for them and others, where applicable. In the course of the QA test, each batch is tested for these properties and the maintenance of the limits is ensured. The measuring methods used can deviate from those specified in the data sheet. Details can be found in the QA test report.