

DELO DUALBOND® AD4930

UV/light and humidity-curing acrylate adhesive, medium viscosity

Base

- modified acrylate
- one-component, solvent-free

Use

- multi-purpose for plastic/plastic, glass/plastic, metal/plastic, glass/glass and glass/metal bondings
- the cured product is normally used in a temperature range of -40 °C to +120 °C; depending on the application, other limits may be more reasonable
- compliant with RoHS directive 2015/863/EU

Processing

- the adhesive is supplied ready for use; in case of cool or refrigerated storage, it must be ensured that the container is conditioned to room temperature before use
- the containers are conditioned at room temperature (max. 25 °C); the conditioning time is approx. 0.5 h for containers up to 50 ml and approx. 4 h for containers up to 1,000 ml; additional heat addition is not allowed
- the adhesive is usually applied by dispensing
- the adhesive can be processed well from the original container or with DELO dispensing units
- the surfaces to be bonded must be dry as well as free of dust, grease and other contaminations
- use DELOTHEN cleaners for the cleaning of bonding surfaces
- for further information please refer to our instructions for use DELO-DUALBOND and the brochure "Light Curing"

Curing

- with UV light or visible light in a wavelength range of 320 - 450 nm and by humidity in shadow zones
- humidity curing starts at the surface of the acrylate; a skin is formed after a few hours; deep curing of the acrylate proceeds with approx. 2mm/24h

Lamp type	DELOLUX 20 / 50 / 80		
Wavelength [nm]	365	400	460
Suitability	+	++	-

- not suitable + suitable ++ especially suitable


Curing parameters

- dependent on material thickness and absorption, adhesive layer thickness, lamp type and distance between lamp and adhesive layer

DELO Industrial Adhesives
DELO-Allee 1
86949 Windach · Germany
Phone +49 8193 9900-0
Fax +49 8193 9900-144
info@DELO.de · www.DELO.de

Absorption spectrum

- photoinitiation system in acrylate matrix

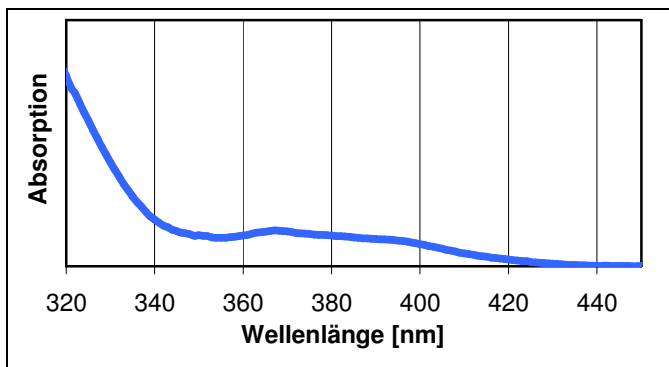

Technical data

Color

uncured in 0.1 mm layer thickness

yellowish

Density [g/cm³]

DELO standard 13

1.1

Viscosity [mPas]

at 23 °C, rheometer, 2 1/s

14000

Processing time

at room temperature (max. 25 °C)

2 weeks

Minimal curing time [s]

DELO Standard 23, UVA intensity: 60 mW/cm², DELOLUXcontrol

5

Minimal curing time [s]

DELO Standard 23, LED intensity: 200 mW/cm², DELOLUXcontrol

3

Compression shear strength glass/glass [MPa]

DELO Standard 5

UVA intensity: 55 - 60 mW/cm², DELOLUXcontrol, irradiation time: 60 s

9

Compression shear strength glass/Al [MPa]

DELO Standard 5

UVA intensity: 55 - 60 mW/cm², DELOLUXcontrol, irradiation time: 60 s

4

Compression shear strength glass/PA [MPa]

DELO Standard 5

UVA intensity: 55 - 60 mW/cm², DELOLUXcontrol, irradiation time: 60 s

8

Compression shear strength glass/PBT [MPa]

DELO Standard 5

UVA intensity: 55 - 60 mW/cm²; DELOLUXcontrol, irradiation time: 60 s

4

Compression shear strength glass/FR4 [MPa]

DELO Standard 5

UVA intensity: 55 - 60 mW/cm², DELOLUXcontrol, irradiation time: 60 s

9

Compression shear strength PMMA/PMMA [MPa]

DELO Standard 5

UVA intensity: 55 - 60 mW/cm², DELOLUXcontrol, irradiation time: 60 s

7

Young's modulus [MPa]

DIN EN ISO 527

30

Tensile strength [MPa]

DIN EN ISO 527

5

Elongation at tear [%]

DIN EN ISO 527

45

Shore hardness A
according to DIN EN ISO 868

80

Glass transition temperature [°C]
DMTA tension, 1Hz

80

Shrinkage [%]
DELO Standard 13

3

Water absorption [%]
DIN EN ISO 62

0.6

Decomposition temperature [°C]
DELO Standard 36

218

Coefficient of linear expansion [ppm/K]
in a temperature range of +30 to +140 °C

210

Processing time
at room temperature (approx. +23 °C)


2 weeks

Storage life
at 0 °C to +10 °C in unopened original container


6 months

Performance under temperature influence


compression/shear strength glass/glass after temperature storage
based on initial value at room temperature
measured at room temperature (approx. 23 °C)
according to DELO standard 5

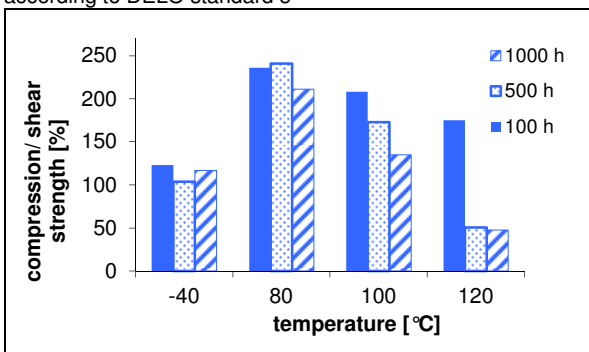

elongation at tear after temperature storage
based on initial value at room temperature
measured at room temperature (approx. 23 °C)
according to DIN EN 527, test specimen type 5A thickness 2 mm

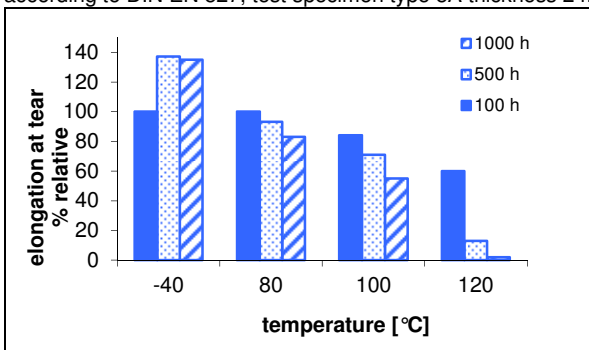

tensile strength after temperature storage
based on initial value at room temperature
measured at room temperature (approx. 23 °C)
according to DIN EN 527, test specimen type 5A, thickness 2 mm

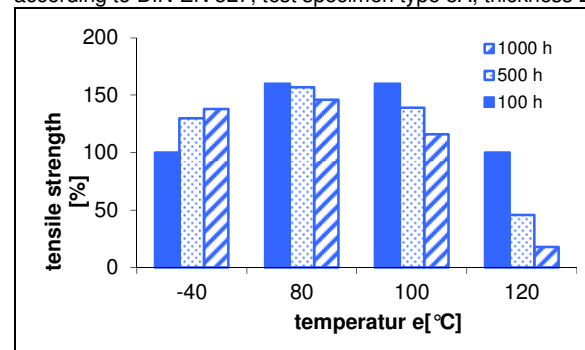

Instructions and advice

General

The data and information provided are based on tests performed under laboratory conditions. Reliable information about the behavior of the product under practical conditions and its suitability for a specific purpose cannot be concluded from this. It is the customer's responsibility to test the suitability of the product for the intended purpose by considering all specific requirements. Type and physical and chemical properties of the materials to be processed with the product, as well as all actual influences occurring during transport, storage, processing and use, may cause deviations in the behavior of the product compared to its behavior under laboratory conditions. The data and information provided are therefore no guarantee for specific product properties or the suitability of the product for the intended purpose.

Nothing contained herein shall be construed to indicate the non-existence of any relevant patents or to constitute a permission, encouragement or recommendation to practice any development covered by any patents, without permission of the owner of this patent.

All products provided by DELO are subject to DELOs' General Terms of Business. Verbal side agreements are not permitted. This document is subject to change.

Instructions for use

The instructions for use of DELO-DUALBOND are available on: www.DELO.de. We will be pleased to send them to you on demand.

Occupational health and safety

see material safety data sheet

Specification

The properties in italics are part of the specification. Ranges with clear limits are defined for them and others, where applicable. In the course of the QA test, each batch is tested for these properties and the maintenance of the limits is ensured. The measuring methods used can deviate from those specified in the data sheet. Details can be found in the QA test report.